


Technical data

Average fill factor	0,735
average spinning loss factor 1960 N/mm ²	0,83
average spinning loss factor 2160 N/mm ²	0,8
Core	Steel core
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	Galvanized
Rope diameter tolerance	0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 6,4 – 26	—	04

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

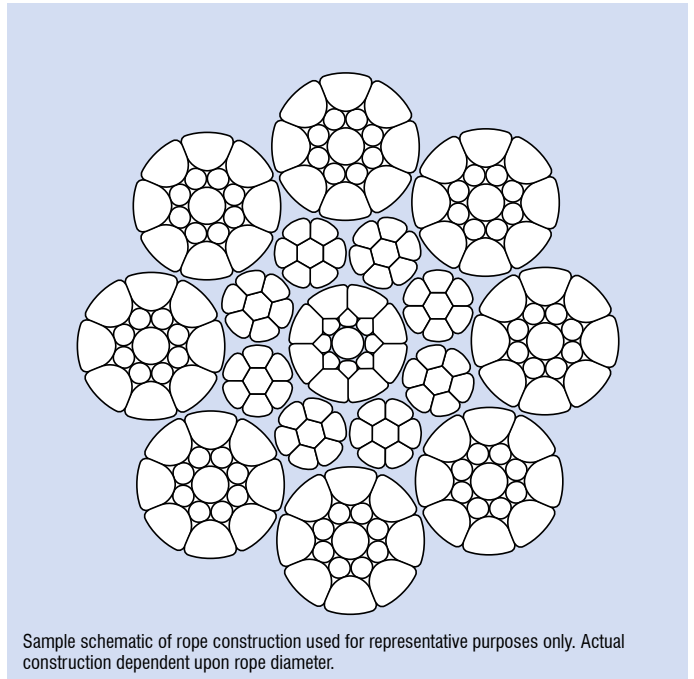

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force F _{min}	
		1960 kN	2160 kN
6,4	21,3	39,2	43,2
8	32	61,2	67,5
9	40,5	77,5	85,4
10	50	95,7	105
11	60,5	116	128
12	72	135	149
13	84,5	159	175
14	98	184	203
15	113	212	233
16	128	241	265
17	144	269	297
18	162	305	336
19	181	340	374
20	200	376	415
22	242	455	502
24	288	542	597
26	338	635	700

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes